

Implementation of
ISO 11786:1995

Agricultural tractors and machinery — Tractor mounted sensor interface — Specification

ICS 65.020.10

Committees responsible for this British Standard

The preparation of this British Standard was entrusted to Technical Committee AGE/31, Agricultural electronic equipment, upon which the following bodies were represented:

- Agricultural Engineers' Association
- Forestry Commission
- Health and Safety Executive
- Milk Marketing Board
- Ministry of Agriculture, Fisheries and Food
- National Farmers' Union
- Silsoe College, Cranfield Institute of Technology
- Silsoe Research Institute

This British Standard, having been prepared under the direction of the Engineering Sector Board, was published under the authority of the Standards Board and comes into effect on 15 December 1995

© BSI 11-1999

The following BSI references relate to the work on this standard:
Committee reference AGE/31
Draft for comment 93/712650 DC

ISBN 0 580 24989 1

Amendments issued since publication

Amd. No.	Date	Comments

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	iii
Text of ISO 11786	1

National foreword

This British Standard reproduces verbatim ISO 11786:1995 and implements it as the UK national standard.

This British Standard is published under the direction of the Engineering Sector Board whose Technical Committee AGE/31 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from Customer Services, BSI, 389 Chiswick High Road, London W4 4AL.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO title page, pages ii to iv, pages 1 to 3 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

INTERNATIONAL STANDARD

ISO
11786

First edition
1995-06-01

Agricultural tractors and machinery — Tractor-mounted sensor interface — Specifications

*Tracteurs et matériels agricoles — Interface des capteurs montés sur le
tracteur — Spécifications*



Reference number
ISO 11786:1995(E)

Contents

	Page
Foreword	iii
1 Scope	1
2 Normative references	1
3 Definitions	1
4 Connector	1
5 Data signals	3
6 Power supply	3
Figure 1 — Seven-pin connector dimensions	2

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 11786 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 19, *Agricultural electronics*.

1 Scope

This International Standard specifies an electrical connector and its pin layout for mounting on an agricultural tractor with a nominal 12-volt battery supply for the purpose of providing an interface between tractor-mounted sensors and equipment requiring signals from those sensors. The connector also provides access to a low-current power source, to provide power primarily to instrumentation.

This International Standard therefore provides a short-term solution to data communication between a restricted set of tractor-mounted sensors and other equipment such as monitors, actuators and control systems on agricultural tractors and attached machinery, in anticipation of the availability of a standardized digital data bus system.

It allows limited data communication facilities for lower specification tractors not fitted with a digital data bus system.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

DIN 405-1:1975, *Knuckle thread: profiles, basic sizes, general plan*.

DIN 405-2:1981, *Knuckle thread: deviations and tolerances*.

3 Definitions

For the purposes of this International Standard, the following definitions apply.

3.1

ground speed signal

actual forward speed of the tractor

3.2

theoretical ground speed signal

product of tractor drive wheel rotational speed and the rolling wheel circumference

NOTE 1 This is the true ground speed where there is no wheel slip. The rolling circumference is defined in ISO 11795, *Agricultural tractor drive wheel tyres — Methods of measuring tyre rolling circumference*.

3.3

linkage position signal

position of the tractor three-point linkage in the vertical plane between its lowest and highest points

3.4

in-work/out-of-work signal

binary status signal indicating that the three-point linkage is situated below (in-work) or above (out-of-work) an adjustable switching threshold

3.5

CMOS

Complementary Metal-Oxide Semiconductor

4 Connector

4.1 Dimensions

The connector shall have the dimensions shown in Figure 1.

4.2 Pin allocation

A seven-pin female bulkhead connector shall be mounted on the tractor with the following pin allocation:

- Pin 1: true ground speed
- Pin 2: theoretical ground speed
- Pin 3: rear PTO rotational speed
- Pin 4: rear three-point implement in-work/out-of-work
- Pin 5: rear three-point linkage position
- Pin 6: power supply
- Pin 7: common ground


Tractor designers may, at their discretion, connect any or none of the pins to the appropriate sources. The pin allocation shall not be changed.

4.3 Specification of connector

4.3.1 The female bulkhead connector shall contain seven pins in a polarized shell in accordance with Figure 1. Pins 6 and 7 shall have a minimum current-carrying capacity of 5A.

The pins shall be plated to minimize contact resistance.

The connector shall withstand a minimum of 400 connect/disconnect cycles without deterioration in performance.

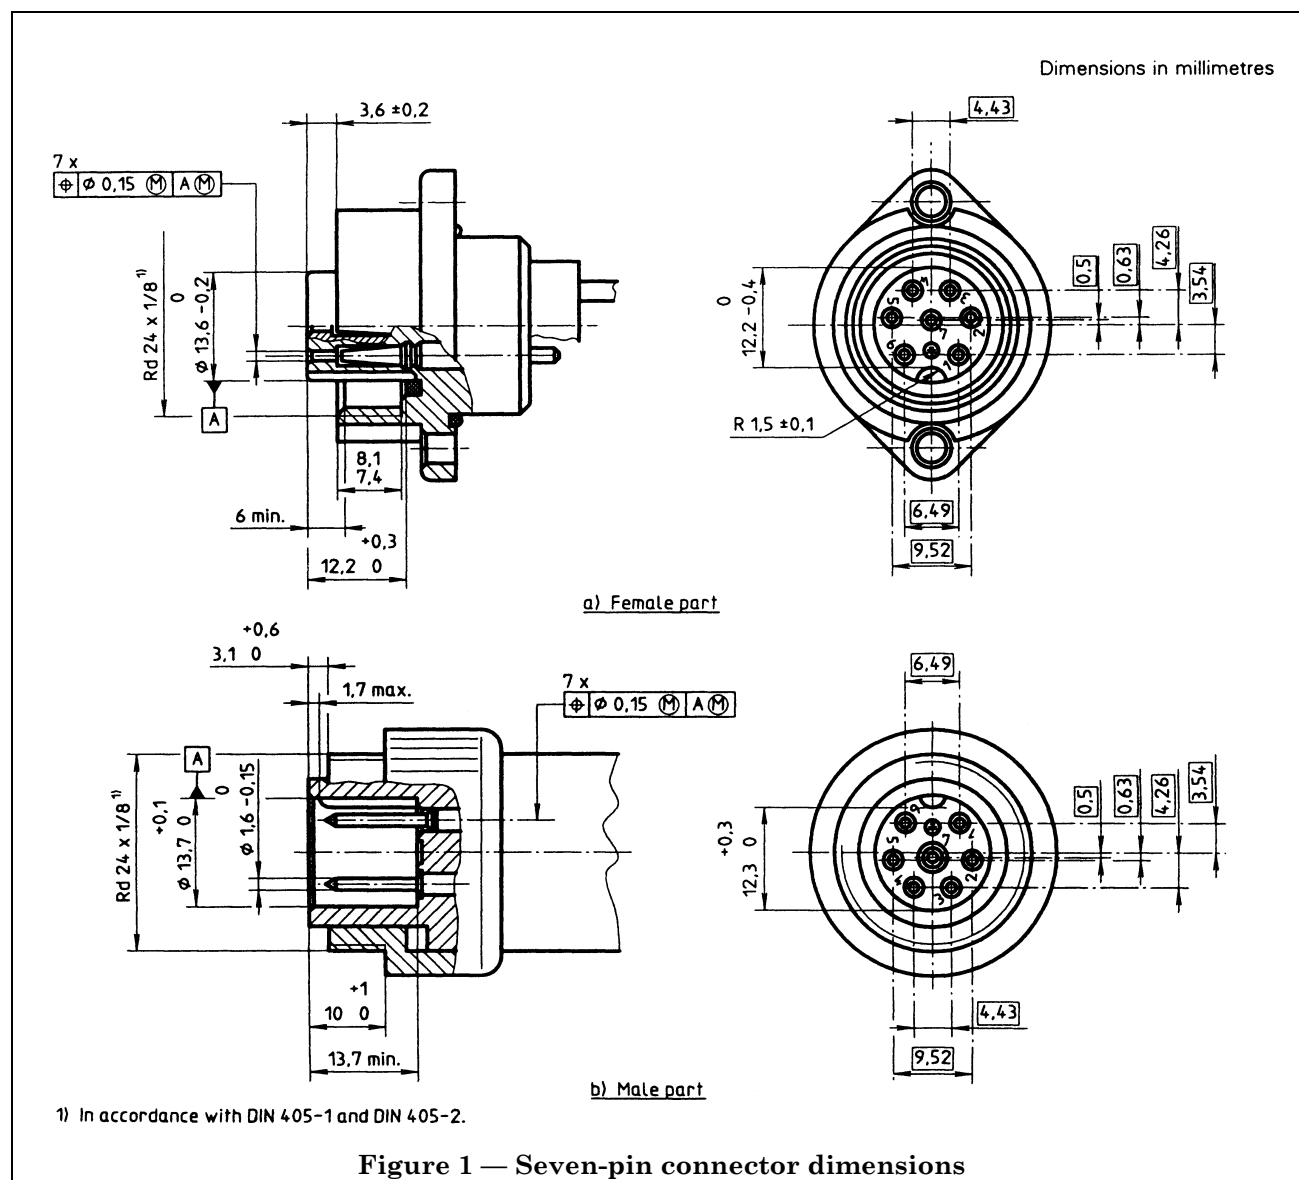

4.3.2 As the position of the connection is not specified in this International Standard, environmental proofing is not specified. It is recommended that designers give consideration to the following connector features:

- moisture sealing,
- closures for when connector is not in use,
- locking rings,
- breakaway.

NOTE 2 The physical connector specification is met by the Amphenol C16-1 connector.

Amphenol is a trade-name. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by ISO of the product named. Equivalent products may be used if they can be shown to lead to the same results.

4.4 Location of connector

The connector shall be located within the tractor cab.

The designer shall give due consideration to the location when determining environmental proofing of the connector. Additional, environmentally proofed seven-pin female connectors may be mounted outside the tractor cab.

5 Data signals

5.1 Signal characteristics

The signal characteristics for true and theoretical ground speed, PTO rotational speed and linkage are so specified as to be compatible with CMOS logic as defined in JEDEC¹⁾, powered from the tractor battery with a minimum voltage of 10 V.

5.2 True ground speed and theoretical ground speed

5.2.1 The signal shall be a square wave with a duty cycle between 20 % and 80 %, and with rise and fall times less than 1 ms.

5.2.2 The signal level of the square wave “mark” (high) shall be greater than 6,3 V and the “space” (low) shall be less than 1,5 V. The output source impedance at “space” (low) shall be $100\ \Omega \pm 10\ \Omega$. The load impedance shall be greater than 3 k Ω .

5.2.3 At speeds greater than 1 km/h, the speed shall be represented by 130 pulses/m $\pm 5\%$ (130 Hz/m/s $\pm 5\%$) in a standard calibration test.

5.3 PTO rotational speed

5.3.1 The signal shall be a square wave with a duty cycle between 20 % and 80 %, and with rise and fall times less than 1 ms.

5.3.2 The signal level of the square wave “mark” (high) shall be greater than 6,3 V and the “space” (low) shall be less than 1,5 V. The output source at “space” (low) shall be $100\ \Omega \pm 10\ \Omega$. The load impedance shall be greater than 3 k Ω .

5.3.3 At rotational speeds greater than 2 r/s, the speed shall be represented by 6 pulses per revolution (6 Hz/r/s).

5.4 In-work/out-of-work

The in-work signal shall be represented by a voltage less than 1,5 V and the out-of-work signal by a voltage greater than 6,3 V. The output source impedance at the in-work position shall be $100\ \Omega \pm 10\ \Omega$. The load impedance shall be greater than 3 k Ω .

NOTE 3 Leading and trailing edges of the linkage up/down signal may be corrupted by switch bounce.

5.5 Linkage position

The signal voltage varies linearly corresponding to the height of the linkage position. The signal shall be 0 V representing the lowest position and 10 V representing the highest position. The load impedance shall be greater than 3 k Ω .

6 Power supply

Power shall be supplied to pin 6 from the tractor battery via the ignition switch.

The maximum current drawn from pin 6 shall be 5 A.

The supply shall be fused at 10 A.

¹⁾ Joint Electron Devices Engineering Council of the Electronic Industries Association, U.S.A.: Standard 13B, *Standard specifications for description of B-series CMOS devices*.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager.
Tel: 020 8996 7070.